




**MKB INTERNATIONAL  
EXPORTS**

A World of Quality Products.

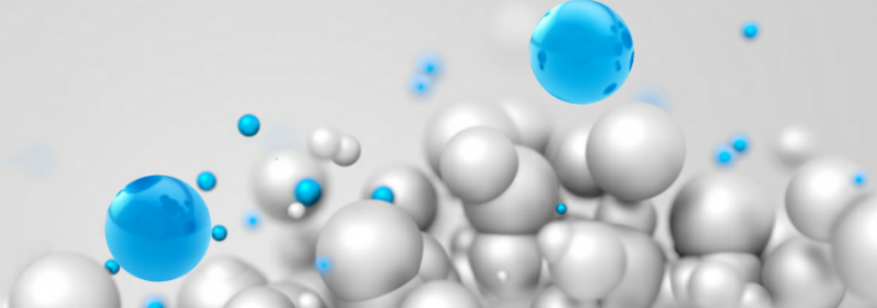

## G-15



### TYPICAL PROPERTIES

Specific Gravity (g/cm <sup>3</sup> )	0.17
Bulk Density (g/cm <sup>3</sup> )	0.14
Average Particle Size, Micron	40
Oil Absorbtion	38 g oil/ cm <sup>3</sup>
Softening Point, F <sup>0</sup>	1800
Pressure for 10% collapse, psi	1250
Colour	White
Physical Form	Free Flowing Powder
pH	7-9
Alkalinity	MAX 0.5 milliequivalents per gram
Thermal Stability	600°C



### SIEVE ANALYSIS (MICRON U.S SIEVE)

70	-50 +100	-100 +200	-200
0%	2	28	70

### Applications:-

Rubber & Plastic  
Low Density Slurry  
Construction Material  
Mining Oil and Gas

Note : The above value may change as per raw materials procurement and figures do not show 100% accuracy.